

BigBee quick start guide

This procedure is absolutely necessary after every head lamp change !!


1. Headlight and LT-focus module are **not** mounted!
BigBee is switched **off**
2. Move headlight's focus mechanic to middle position by hand.
Count total turns and use half of it to find roughly middle position.
3. Connect LT-focus module cable to BigBee.
4. Press and hold „up“ button at display.



5. Switch BigBee on.
6. Release „up“ button
Wait while display indicates „**wait (warten) adjust**“
5. BigBee now moves Pan-Tilt and focus axles to mounting position automatically.
Wait until display indicates „**ready!ready!**“



6. Mount headlight into BigBee, observe direction!
Front is light to logo

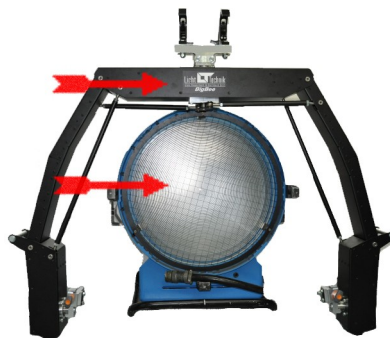

7. Mount LT-focus module at headlight
8. Use menu (Menü) P03 for automatic adjust of LT-focus drive
9. After adjustment is done push „ok“ button **two** times
BigBee system is ready for use

Important for BigBee with LT-VisionControl use:

1. Check menu **P01** ----- adjust dmx adress: **001**
2. Check menu **P27** ----- adjust: **01**

Observe operating and safety instructions!!! Observe manual!!